


PRECASTERS NOTEBOOK

August 1999
Chapter 5, Page 2

GARY K. MUNKELT, PE

- B. In Ground - Some Specifications require testing of the product after it is installed in the ground. In the past, a popular method was filling the unit with water and observing the loss of water over a period of time. This method can be expensive when water must be trucked to the jobsite.

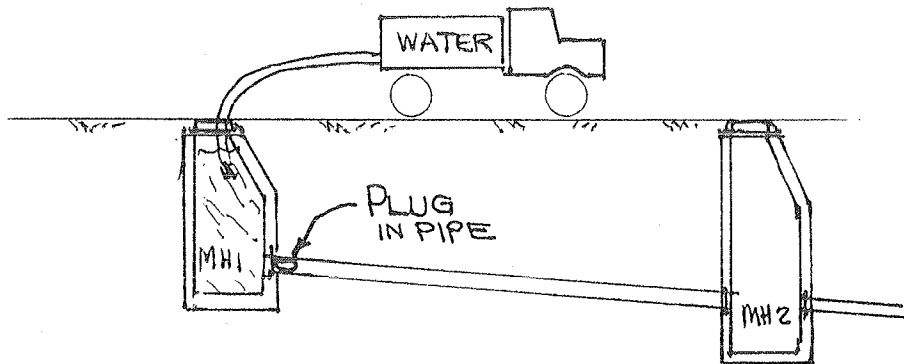

A new method becoming popular is the use of a vacuum that can be applied before the product is installed in the ground or it can be applied after the product is installed in the ground.

